


COMPUTER ACCESSORIES

1987 DEALER FLYER

ARRICK
COMPUTER PRODUCTS

POWER CENTER

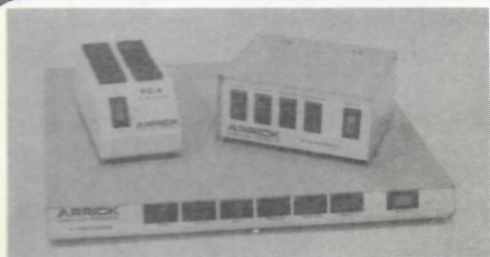


- 3 MODELS FOR ALL NEEDS.
- VOLTAGE SPIKE PROTECTION.
- EMI/RFI NOISE FILTER.
- CIRCUIT BREAKER PROTECTION.
- 6 FOOT POWER CORD.

SWITCHES

- CONNECT AND DISCONNECT COMPUTERS AND THEIR COMPONENTS AT THE FLIP OF A SWITCH.
- ELIMINATE CONNECTOR WEAR CAUSED BY PLUGGING AND UNPLUGGING CABLES.
- ORGANIZE MESSY CABLES.
- OVER 100 MODELS COMPATIBLE WITH VIRTUALLY ALL COMPUTERS, PRINTERS, TERMINALS AND MODEMS.
- STURDY, ATTRACTIVE METAL DESIGN.




CABLES

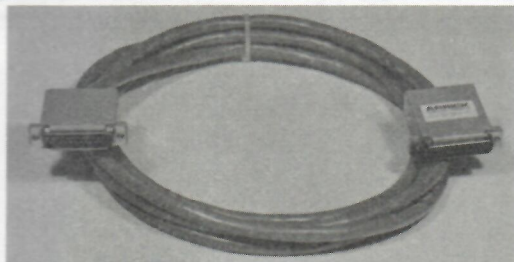

- PRINTER CABLES.
- TERMINAL, MODEM CABLES.
- CUSTOM CABLES AVAILABLE.
- RETAIL PACKAGING AVAILABLE.
- SHIELDED CABLES HELP COMPUTER INSTALLATIONS MEET FCC REQUIREMENTS.

OTHER ITEMS

- PRINTER STANDS.
- BULK CABLE.
- CONNECTORS.
- PANELS.
- WALL PLATES.

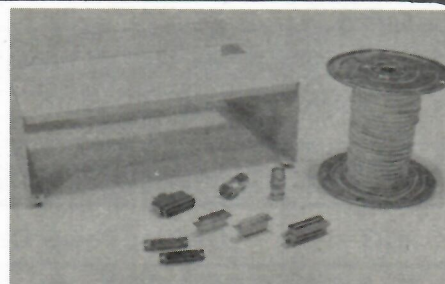

(817) 540-0938

POWER CENTERS

FACTS ABOUT POWER LINE DISTURBANCES

Power line disturbances are frequently the cause of computer "crashes," lost data and other erratic behavior. Lightning, large appliances and power companies are often the source of damaging surges, spikes and noise that can sometimes ruin SOFTWARE AND HARDWARE. Equipment is subject to damage even when turned off. Computer owners tired of this problem frequently invest in some type of surge suppressor/noise filter to protect their valuable system. Most think of the expense as "Insurance," and "inexpensive insurance" at that.

The ARRICK COMPUTER PRODUCTS power centers protect your system with a minimal investment. The protection offered by the power centers include voltage surge protection, EMI/RFI noise filtration and overload protection. Whether the power center is switched on or off, your equipment will be protected.

SPECIFICATIONS

LINE VOLTAGE: 115 VAC. 50-60 Hz

MAXIMUM LINE CURRENT: 15 AMPERES

CLAMPING VOLTAGE: 150

CLAMPING RESPONSE TIME: LESS THAN 50 NANO-SECONDS

EMI/RFI SUPPRESSION: FILTERS POTENTIAL HARMFUL LEVELS OF EMI/RFI NOISE.

OVERLOAD PROTECTION: 15 AMP RESETABLE CIRCUIT BREAKER.

PC-4

- Master switch controls 6 outlets.
- Circuit breaker protects against overloads.
- 6 foot power cord.
- Protects equipment against damaging voltage spikes.
- Filter suppresses EMI/RFI noise.



MODEL	DESCRIPTION	1-4	5-24	25-99	100-499	LIST
PC-4	6 Outlet Power Center	42.00	39.00	36.00	33.00	59.95

PC-3

- Control of computer and peripherals at the touch of a finger.
- Eliminate reaching behind equipment for power switches.
- 4 individually controlled outlets.
- Convenient desktop design.
- Protects equipment against damaging voltage spikes.
- Filter suppressed EMI/RFI noise.
- 3" height, 6" width, 5" depth.



MODEL	DESCRIPTION	1-4	5-24	25-99	100-499	LIST
PC-3	Desktop Power Center	63.00	58.50	54.00	49.50	89.55

TO ORDER CALL: (817) 540-0938

PRICING ON
LARGER QUANTITIES
AVAILABLE UPON
REQUEST

ARRICK
COMPUTER PRODUCTS


POWER CENTERS

PC-7

Control your computer and peripherals at the touch of a switch. The PC-7 fits under the monitor of most desktop computers and has 6 individually controlled outlets. No more reaching behind equipment in search of hidden power switches. Protects equipment from harmful voltage surges, filter suppresses EMI/RFI noise and a circuit breaker protects against overloads. Convenience and protection at a reasonable price.

1 3/4" HEIGHT, 15" WIDTH, 13" DEPTH

- MATCHES IBM PAINT COLORS.
- STURDY METAL DESIGN.
- 6 INDIVIDUALLY CONTROLLED OUTLETS.
- PROTECT EQUIPMENT AGAINST DAMAGING VOLTAGE SPIKES.
- FILTER SUPPRESSES EMI/RFI NOISE.
- 15 AMP CAPACITY.

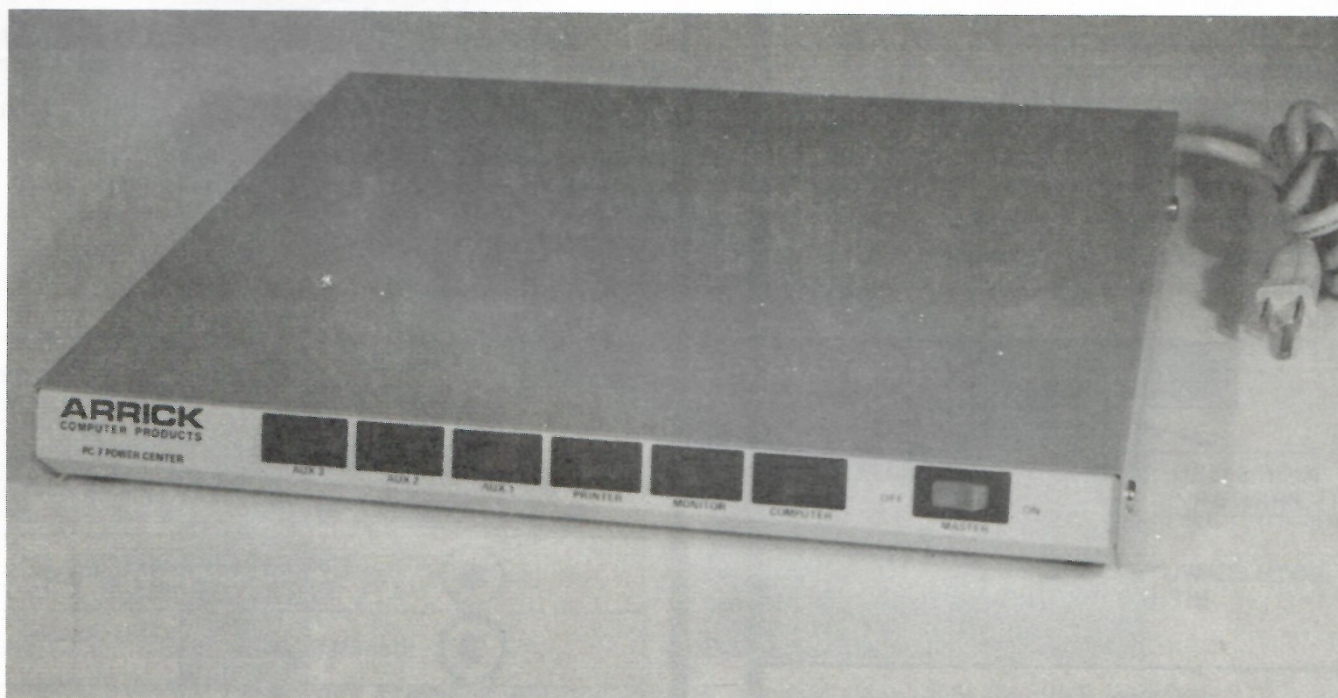

MODEL	DESCRIPTION	1-4	5-24	25-99	100-499	LIST
PC-7	Under Monitor Power Center	69.00	64.00	59.00	54.00	99.95

TO ORDER CALL: (817) 540-0938

PRICING ON
LARGER QUANTITIES
AVAILABLE UPON
REQUEST


ARRICK
COMPUTER PRODUCTS

SWITCHES


- CONNECT AND DISCONNECT COMPUTERS AND THEIR COMPONENTS AT THE FLIP OF A SWITCH.
- ELIMINATE CONNECTOR WEAR CAUSED BY PLUGGING AND UNPLUGGING CABLES.
- MODELS COMPATIBLE WITH VIRTUALLY ALL COMPUTERS, PRINTERS, TERMINALS AND MODEMS.
- ATTRACTIVE ALL METAL DESIGN.




APPLICATIONS

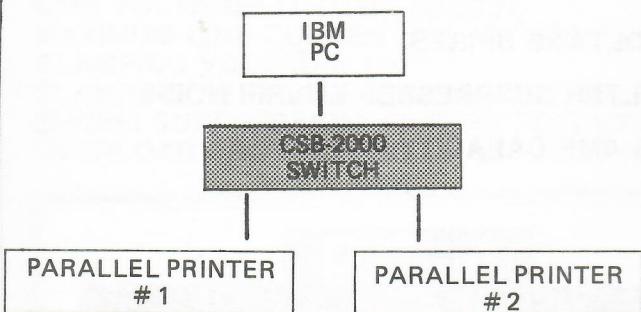

ALLOWS USE OF 2 PRINTERS WITH ONE COMPUTER.

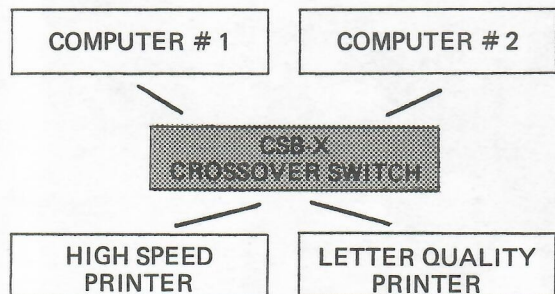

BOTH COMPUTERS HAVE ACCESS TO EITHER PRINTER.

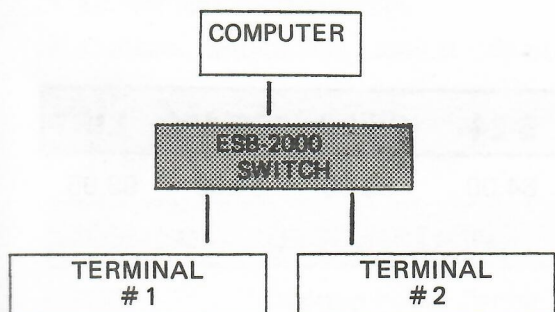

2 TERMINALS CAN SHARE ONE PORT ON A COMPUTER.

TYPES

CONNECTOR	SERIES	USED WITH
	ESB	RS-232 (Serial) Interfaces
	CSB	Centronics (Parallel) Interfaces
	3SB	RS-499, Others
	ISB	IEEE-488 Interfaces
	DSB	Commodor, TRS-80, IBM, Others
	9SB	RS-449, Atari, Others
	1SB	NCR, TI, IBM, Others
	PSB	IBM, Other PC's
	RSB	Telephone, Dataphone
	USB	Utility
	BSB	BNC Coaxial
	ASB	TNC Coaxial
	WSB	Wang Dual Coaxial
	XSB	IBM Twinaxial
	VSB	V.35 Interfaces
	MSB	Data Products, Dec, others
	5SB	Data Products, Data Point, Others
	LSB	Phone, Datapoint, Others

ESB SERIES QUICK-SWITCH



TYPE: RS-232 (Serial).

USED WITH: Virtually all devices with the industry standard RS-232 (Serial) interface.

CONNECTORS: Female, 25 pin, DB25S.



STANDARD SWITCHES

(USED WHEN ONLY 12 OF THE MOST POPULAR
LINES NEED TO BE SWITCHED — 2-8, 11, 15, 17, 20, 22.)

MODEL	DESCRIPTION	1-4	5-24	25-99	100-499	LIST
ESB-2000	RS-232, 2 position, 12 lines switched	53.20	49.40	45.60	41.80	75.95
ESB-3000	RS-232, 3 position, 12 lines switched	60.20	55.90	51.60	47.30	85.95
ESB-4000	RS-232, 4 position, 12 lines switched	70.00	65.00	60.00	55.00	99.95
ESB-5000	RS-232, 5 position, 12 lines switched	74.20	68.90	63.60	58.30	105.95
ESB-6000	RS-232, 6 position, 12 lines switched	88.20	81.90	75.60	69.30	125.95
ESB-X	RS-232, cross over, 12 lines switched	63.00	58.50	54.00	49.50	89.95

SPECIAL SWITCHES

(USED WHEN 24 LINES
NEED TO BE SWITCHED.)

MODEL	DESCRIPTION	1-4	5-24	25-99	100-499	LIST
ESB-2100	RS-232, 2 position, 24 lines switched	63.00	58.50	54.00	49.50	89.95
ESB-3100	RS-232, 3 position, 24 lines switched	74.20	68.90	63.60	58.30	105.95
ESB-4100	RS-232, 4 position, 24 lines switched	91.00	84.50	78.00	71.50	129.95
ESB-5100	RS-232, 5 position, 24 lines switched	98.00	91.00	84.00	77.00	139.95
ESB-X1	RS-232, cross over, 24 lines switched	84.00	78.00	72.00	66.00	119.95

CSB SERIES QUICK-SWITCH



TYPE: Centronics (Parallel).

USED WITH: Virtually all devices with the industry standard Centronics (Parallel) interface.


CONNECTORS: Female, 36 pin, Amphenol 57-40360.



MODEL	DESCRIPTION	1-4	5-24	25-99	100-499	LIST
CSB-2000	Centronics, 2 position switch	67.20	62.40	57.60	52.80	95.95
CSB-3000	Centronics, 3 position switch	74.20	68.90	63.60	58.30	105.95
CSB-4000	Centronics, 4 position switch	88.20	81.90	75.60	69.30	125.95
CSB-5000	Centronics, 5 position switch	95.20	88.40	81.60	74.80	135.95
CSB-X	Centronics, cross over switch	81.20	75.40	69.60	63.80	115.95

CABLES

- THIS IS JUST A PARTIAL LISTING.
- CUSTOM CABLES AVAILABLE.
- M-M = MALE TO MALE F-M = FEMALE TO MALE

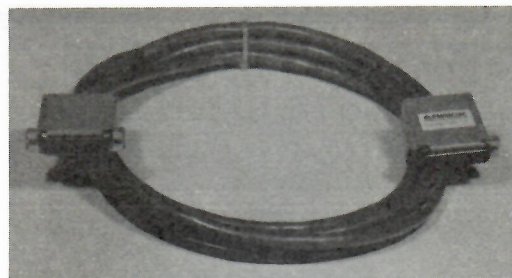

RS-232 12 LINE CABLES

PART NO.	DESCRIPTION	1 - 4	5 - 99	LIST
CA-R12M-6	6' 12 Line, M-M, RS-232 Cable	10.60	9.84	15.15
CA-R12M-10	10' 12 Line, M-M, RS-232 Cable	11.75	10.91	16.80
CA-R12M-25	25' 12 Line, M-M, RS-232 Cable	16.06	14.91	22.97
CA-R12M-50	50' 12 Line, M-M, RS-232 Cable	23.25	21.59	33.25
CA-R12X-6	6' 12 Line, F-M, RS-232 Cable	10.60	9.84	15.15
CA-R12X-10	10' 12 Line, F-M, RS-232 Cable	11.75	10.91	16.80
CA-R12X-25	25' 12 Line, F-M, RS-232 Cable	16.06	14.91	22.97
CA-R12X-50	50' 12 Line, F-M, RS-232 Cable	23.25	21.59	33.25

RS-232 25 LINE CABLES

PART NO.	DESCRIPTION	1 - 4	5 - 99	LIST
CA-R25M-6	6' 25 Line, M-M, RS-232 Cable	14.60	13.56	20.88
CA-R25M-10	10' 25 Line, M-M, RS-232 Cable	16.76	15.56	23.96
CA-R25M-25	25' 25 Line, M-M, RS-232 Cable	24.84	23.07	35.52
CA-R25M-50	50' 25 Line, M-M, RS-232 Cable	38.32	35.58	54.79
CA-R25X-6	6' 25 Line, F-M, RS-232 Cable	14.60	13.56	20.88
CA-R25X-10	10' 25 Line, F-M, RS-232 Cable	16.76	15.56	23.96
CA-R25X-25	25' 25 Line, F-M, RS-232 Cable	24.84	23.07	35.52
CA-R25X-50	50' 25 Line, F-M, RS-232 Cable	38.32	35.58	54.79

CENTRONICS CABLES

PART NO.	DESCRIPTION	1 - 4	5 - 99	LIST
CA-C25M-6	6' Centronics, M-M Cable	15.17	14.09	21.69
CA-C25M-10	10' Centronics, M-M Cable	17.33	16.09	24.77
CA-C25M-15	15' Centronics, M-M Cable	20.02	18.59	28.63
CA-C25M-25	25' Centronics, M-M Cable	25.41	23.60	36.34
CA-C25X-6	6' Centronics, M-F Cable	15.17	14.09	21.69
CA-C25X-10	10' Centronics, M-F Cable	17.33	16.08	24.77
CA-C25X-15	15' Centronics, M-F Cable	20.02	18.59	28.63
CA-C25X-25	25' Centronics, M-F Cable	25.41	23.60	36.34

OTHER CABLES

PART NO.	DESCRIPTION	1 - 4	5 - 99	LIST
CA-1030-6	6' IBM PC Parallel Printer Cable	10.64	9.88	15.22
CA-1030-10	10' IBM PC Parallel Printer Cable	12.03	11.17	17.20
CA-1031-6	6' IBM PC Modem Cable	10.52	9.77	15.04
CA-1031-10	10' IBM PC Modem Cable	11.61	10.78	16.60
CA-1090-6	6' TRS-80 II, 12, 16 Printer Cable	18.33	17.02	26.21
CA-1090-10	10' TRS-80 II, 12, 16 Printer Cable	21.56	20.02	30.83
CA-1233-6	6' MacIntosh Serial Printer Cable	9.49	8.81	13.57
CA-1233-10	10' MacIntosh Serial Printer Cable	9.92	9.21	14.18

WE CARRY A FULL LINE OF CABLES FOR APPLE, IBM AND OTHER COMPUTERS

(817) 540-0938

CABLE



DESCRIPTION

PART # PRICE PER FOOT

4 CONDUCTOR UNSHIELDED CABLE	C-4	.09
4 CONDUCTOR SHIELDED CABLE	C-4S	.15
12 CONDUCTOR UNSHIELDED CABLE	C-12	.25
12 CONDUCTOR SHIELDED CABLE	C-12S	.33
25 CONDUCTOR SHIELDED CABLE	C-25S	.58
OTHER CABLE AVAILABLE		

CONNECTORS



DESCRIPTION

PART

1-9

10-UP

25 PIN MALE RS-232 WITH SOLDER PINS.	DB25P	1.67	1.54
25 PIN FEMALE RS-232 WITH SOLDER PINS.	DB25S	1.67	1.54
RS-232 PLASTIC HOOD WITH SCREWS	DB25H	.92	.85
JACK SOCKETS TO MOUNT CONNECTORS TO PANELS. SET OF TWO	D-20418-2	.50	.46
MALE 36 PIN CENTRONICS CONNECTOR WITH HOOD. SOLDER PINS.	57-30360	3.34	3.08
AS ABOVE, FEMALE. OTHER CONNECTORS AVAILABLE.	57-60360	3.34	3.08

STANDS



MODEL

DESCRIPTION

1-4

5-99

LIST

PS-80	80 Column Desktop Printer Stand	17.50	15.00	24.95
PS-132	132 Column Desktop Printer Stand	21.00	18.00	29.95
AS-II	Apple II Computer Stand	28.00	24.00	39.95
DISK-O-TEL	Desktop Disk Organizer	35.00	30.00	49.95

Send for our Catalog

- OVER 110 TYPES OF SWITCHES.
- HUNDREDS OF CABLE ASSEMBLIES.
- POWER CENTERS, SURGE PROTECTORS.
- BULK CABLE AND CONNECTORS.
- PRINTER STANDS.



(817) 540-0938

ARRICK
COMPUTER PRODUCTS

2107 W. Euless Blvd. • Euless, Texas 76040

Bulk Rate
U.S. POSTAGE
PAID
Hurst, Texas
Permit No. 164